

1500 and 3000-PSI IN-LINE FILTERS

For 238, 149 and 74.
 .75 (1.5 IN. Hg) pressure drop
 at 150 SUS viscosity fluid.

6IL rated at 5 GPM (suction).
 15IL rated at 15 GPM (suction).
 These filters can also be used
 for higher return flows. Here
 higher pressure drops (to 350
 psi) can usually be tolerated and
 finer micron ratings are possible
 depending on element pore size
 and fluid viscosity. Their sturdy
 machined-aluminum, steel, or
 stainless steel housings give
 them the strength to be pressure
 rated at 1500 or 3000 psi.

These units use pleated
 elements made from either
 stainless steel wire cloth or
 cellulose (paper), with a
 perforated metal support tube
 inside. These elements can
 be easily removed for cleaning
 or replacement. (They can not
 be cleaned by backflushing
 while in the housing.)


REPLACEMENT ELEMENTS 350 PSID

MICRON RATING	6IL PART NO.	15IL PART NO.
REINFORCED ΔP ELEMENTS		
595	8504-595	8560-595
238	8504	8560
149	8504-01	8560-01
74	8504-02	8560-02
40	8504-04	8560-04
25	8504-05	8560-05
10W	8286-10W	
05C	8504-20	8560-20
10C	8504-11	8560-11

6IL & 15IL U-BRACKETS

TO FIT	FLOW EZY NO.
6ILA & 6ILS 6ILSS	026M030 026M030-SS
15ILA & 15ILS 15ILSS	038M044 038M044-SS

	6IL	15IL
A	4-15/16	6-5/16
B	1-3/8	2
C	1-5/8	2-3/8
D	1-1/2	2-1/8

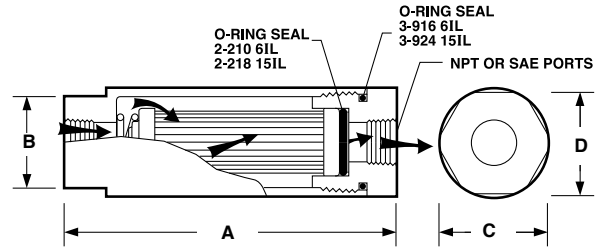

HOW TO ORDER

Select the desired specifications from the ordering table and build an ordering code number, as shown in this sample:

6ILA - **03** - **74** - **F3** - **U**
 STYLE - PORTS - ELEMENT - SEALS - BRACKET
(omit if not wanted)

STYLE	PORTS		ELEMENT† (Micron)	SEALS	BRACKET			
	NPT	SAE						
6ILA (Aluminum, 1500 psi) 6ILS (Steel, 3000 psi) 6ILSS (Stainless Steel, 3000 psi)	03 (3/8)	03S (3/4-16) (UNF-2B) 04S (7/8-14)	Stainless wire: 595 238 149 74 40 25 10*	no symbol (Buna N) F3 Viton	U			
	04 (1/2)							
	15ILA (Aluminum, 1500 psi) 15ILS (Steel, 3000 psi) 15ILSS (Stainless Steel, 3000 psi)					06 (3/4)	06S (1-1/16-12) (UNE-2B) 08S (1-5/16-12) (UNF-2B)	Cellulose: 5C 10C Micro-glass: 03G 08G
	08 (1)							

†Other element ratings available on request *Available on 6IL only.



Shown with optional U-Bracket