

Clariflow®-E

Hydrophilic PES membrane cartridges for aqueous applications

Clariflow®-E cartridges are optimized for use in microelectronics applications such as DI water and aqueous-based chemicals. The unique mirrored-anisotropic PES (Polyethersulfone) membrane has exceptionally high flow rates and on-stream lifetime while providing consistent removal of both organic and inorganic particulates.

The combination of hydrophilic PES membrane and a high-purity, all-polypropylene support structure results in a very low level of ionic and organic extractables, broad chemical compatibility, and resistance to particle shedding.

Every cartridge is fabricated in a clean room environment, pre-flushed with 18 megohm-cm ultrapure DI water, and 100% integrity tested in an ISO-certified facility.

Benefits

- High-retention hydrophilic membrane
- High flow rate
- Broad chemical compatibility for multiple applications
- Long on-stream life
- 100% integrity tested

Applications

- BOE
- Dilute HF
- POU DI rinse
- Bulk DI water systems
- Copper plating
- Ni plating
- Hard disk wash processes
- Other dilute acids and bases

Parker Hannifin Corporation provides our customers with unsurpassed product consistency and cost-efficiency. Our experienced professionals can help you select the right solution for your application. For more information or to place an order, contact your local distributor. Information on product specifications, applications and chemical compatibility can be found on our web site at www.parker.com or through your nearest **Parker Hannifin Corporation** office.

Parker Hannifin Corporation designs and manufactures an extensive line of innovative solutions for specific applications in the Microelectronics, Biopharmaceutical, Food and Beverage, Industrial and Chemical industries.



ENGINEERING YOUR SUCCESS.

Clariflow®-E

Specifications

Materials of Construction

Membrane : Polyethersulfone
 Support layers : Polypropylene
 Structure : Polypropylene

Effective Filtration Area

6.8ft²(0.63m²) per 10" (250mm) cartridges

Maximum Differential Pressure/ Temperature

Forward: 80psid (5.5bar) @ 75°F (24°C)
 40psid (2.8bar) @ 180°F (82°C)

Reverse: 50psid (3.4bar) @ 75°F (24°C)

Cleanliness (particle shedding)

Dry-packed: <1 particles/ml >0.2µm
 after 6gal at 1gpm

Data as from open bag and installed, no
 additional installation flushing.

Resistivity Rinse-up


Resistivity rinse-up to background minus
 0.2megohm-cm of feed after 20gal @
 1gpm.

Performance Attributes

Water Flow rates, Typical *

0.02µm 0.5gpm/psid (2.75lpm/100mbar)
 0.04µm 1.0gpm/psid (5.49lpm/100mbar)
 0.10µm 1.8gpm/psid (9.88lpm/100mbar)
 0.20µm 3.7gpm/psid (20.31lpm/100mbar)
 0.45µm 4.8gpm/psid (26.35lpm/100mbar)
 0.65µm 8.9gpm/psid (48.86lpm/100mbar)
 0.80µm 9.5gpm/psid (52.16lpm/100mbar)

* Per 10-inch (250 mm) cartridge equivalent.

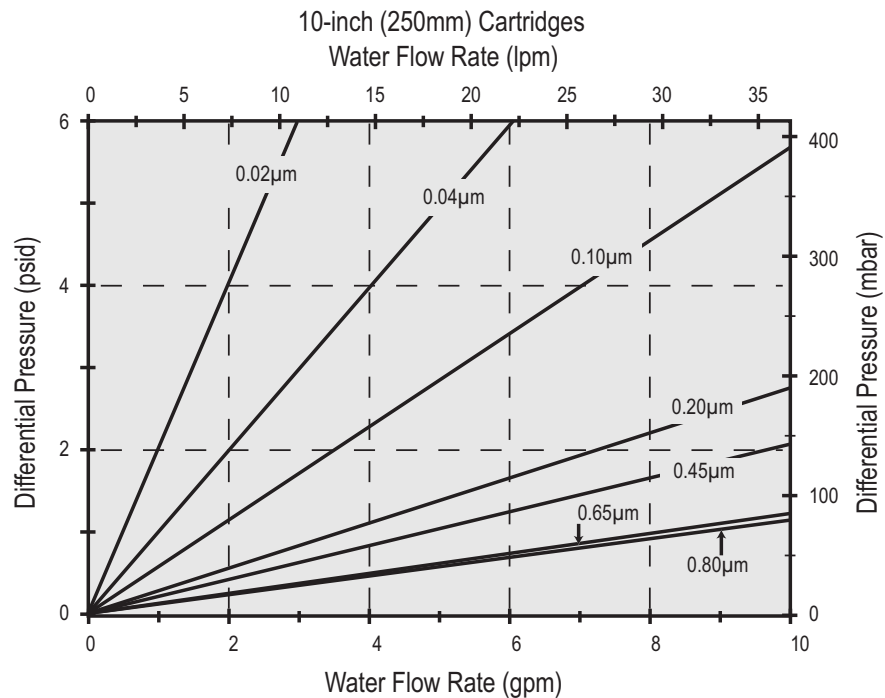

Ordering Information

Each cartridge is identified with a product number, pore size and lot number for traceability.

25 - [] 0 [] [] - [] [] [] - [] [] - [] - E

Insert Style		End Fitting		Nominal Length		Filter Rating		Gasket/O-Rings		Thickness (Gaskets Only)	
CODE	DESCRIPTION	CODE	DESCRIPTION	CODE	LENGTH	CODE	MICRON	CODE	MATERIAL	CODE	THICKNESS
1	None (STD)	0	DOE (CUNO®)	05 ²	5" (130mm)	922	0.02µm	0	Buna N	1	0.200" (5mm)
5	Encapsulated 316L	1	DOE	10	10" (250mm)	924	0.04µm	1	EPDM	2	0.125" (3mm)
		2*	226/Flat	20	20" (500mm)	001	0.10µm	2	Silicone	4	(1) 0.200" (5mm) & (1) 0.125" (3mm)
6	Encapsulated	3*	222/Flat	30	30" (750mm)	002	0.20µm	4	Viton®	N	No Gasket
		6	020/Internal/Flat	40	40" (1,000mm)	004	0.45µm	5 ³	FEP Encapsulated		
A	1/2" Shortened on 222 Fitting	7*	226/Fin			006	0.65µm	6 ³	FEP Encapsulated		
		8*	222/Fin			008	0.80µm	N	Silicone		
		G	120/Internal/Recessed Endcap						None		
		H	213/Recessed Endcap (Ametek)								
		R	222/Recessed Endcap								

* 5" cartridges are available in these configurations
² 5" cartridges are available in 0.04 through 0.8 µm ratings.
³ O-rings only.

Specifications are subject to change without notification.
 Clariflow is a registered trademark of Parker Hannifin Corporation. Viton is a registered trademark of E. I. DuPont de Nemours & Co., Inc.
 Cuno is a registered trademark of Cuno Inc.

© 2008 Parker Hannifin
 Process Advanced Filtration Inc.
 All Rights Reserved
 SPEC-25E Rev L 04/08



(513) 860-3445 | Sales@fischer-robertson.com

ENGINEERING YOUR SUCCESS.