




Two Stage Panel Filters

Series S20 - Enameled Steel • Series S22 - 304 Stainless Steel

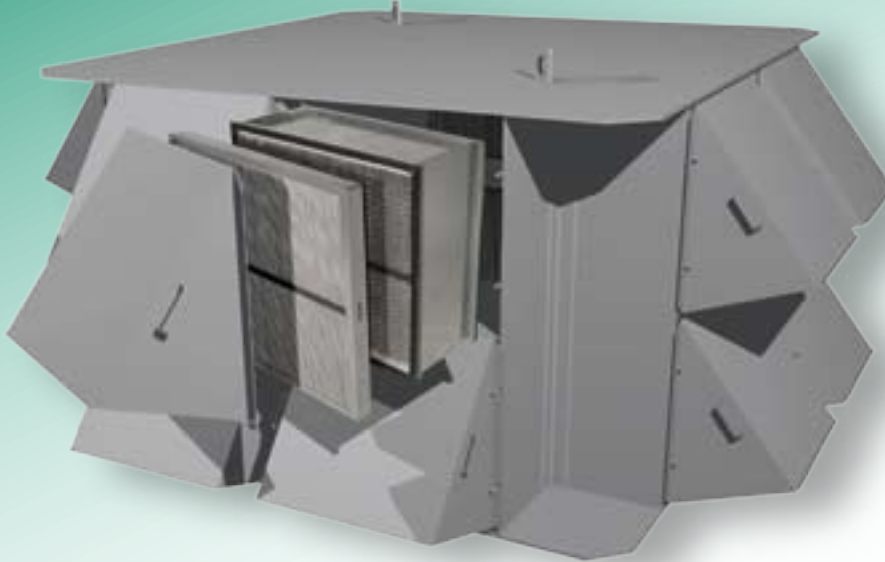

• Exceptional Construction.

All seams are seal welded, not caulked or spot welded. Our filter panels are held in place with 3/8" wing nuts, not metal clips. We offer the highest quality workmanship backed by our unequalled turn around time. Our team also offers housings in 304 Stainless Steel & other materials with all seams seal welded against leakage. A safety cage guarding the outlet is standard. Silencer materials are also added.

• 329-9928 1st Stage Element

This filter panel incorporates pleated polyester filter media @ 10-25µ retention. Panels can be cleaned by using indirect compressed air or mild detergent cleaning solution. Woven wire screen armors both faces of the synthetic filter media. A pull strap across the face of the panel ensures ease in maintenance. The frame is one piece electrogalvanized steel. Downstream expanded metal or woven wire face screen.

• 329-9927 2nd Stage


This filter panel incorporates pleated microglass filter media with gaskets on each face. It's filter media offers 99.97% efficiency @ 2µ retention with aluminum fin spacers and a galvanized frame construction.

• Options include:

Support legs, weather hoods, hinged weather hoods, gauges, ΔP Taps, spring latches, rupture disk panels, and louvers. Top or side outlet is also available.

Panel Filters should be used in non-pulsating flows. Consult us for before considering use w/reciprocating compressors.

Enameled Steel Housing Cat No.	304SS Housing Cat. No.	Typ. Flow CFM	Max Flg	Panel Open-ings	W Max*	L Max*	H Max*	C Ref*	Wgt Lbs.	1st Stage Elem. No.	2nd Stage Elem. No.
S20-0001-FF-120	S22-0001-FF-120	2,500	12"	1	25"	40"	26½"	6"	150	329-9928	329-9927
S20-0002-FF-200	S22-0002-FF-200	5,000	20"	2	40"	32"	26½"	6"	300	329-9928	329-9927
S20-0003-FF-200	S22-0003-FF-200	7,500	20"	3	40"	72"	26½"	6"	400	329-9928	329-9927
S20-0004-FF-200	S22-0004-FF-200	10,000	20"	4	40"	46"	26½"	6"	450	329-9928	329-9927
S20-0006-FF-360	S22-0006-FF-360	15,000	36"	6	92"	60"	26½"	8"	650	329-9928	329-9927
S20-0008-FF-360	S22-0008-FF-360	20,000	36"	8	92"	92"	26½"	8"	1100	329-9928	329-9927
S20-0010-FF-360	S22-0010-FF-360	25,000	36"	10	92"	80"	54"	8"	1400	329-9928	329-9927
S20-0012-FF-360	S22-0012-FF-360	30,000	36"	12	92"	80"	54"	8"	1550	329-9928	329-9927
S20-0014-FF-360	S22-0014-FF-360	35,000	36"	14	92"	92"	54"	8"	1700	329-9928	329-9927
S20-0016-FF-360	S22-0016-FF-360	40,000	36"	16	92"	92"	54"	8"	1800	329-9928	329-9927
S20-0018-FF-360	S22-0018-FF-360	45,000	36"	18	92"	80"	78"	8"	2100	329-9928	329-9927
S20-0020-FF-360	S22-0020-FF-360	50,000	36"	20	92"	92"	78"	8"	2300	329-9928	329-9927
S20-0024-FF-360	S22-0024-FF-360	60,000	36"	24	92"	92"	78"	8"	2500	329-9928	329-9927

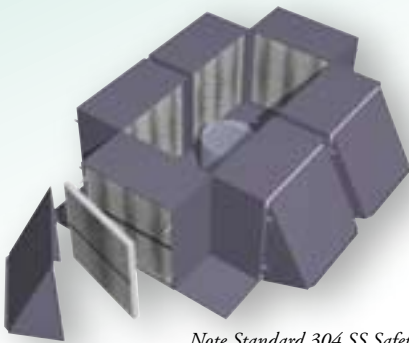


Note Standard 304 SS Safety Cage Located over discharge Connection.

(1) Dimensions are approx., Refer to approval drawings for actual dimensions & tolerances.
 (2) Optional Weather Hoods add 11" to L and/or W i.e. hoods on two sides add 22".

S22 Series stainless steel housing w/optional weather hood




S20-0018-FF-360

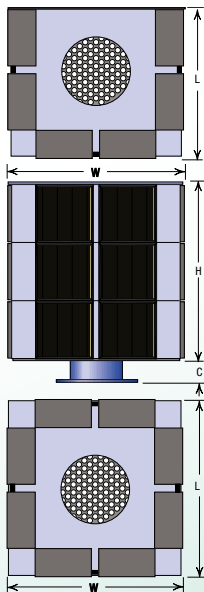


S20-0024-FF-360
S20-0020-FF-360
w/4 blanks

S20-0012-FF-360
S20-0010-FF-360
w/ 2 blanks

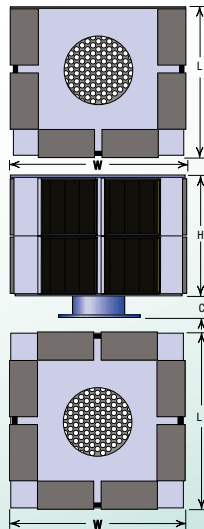


S20-0016-FF-360
S20-0014-FF-360
w/2 blanks

S20-0006-FF-360

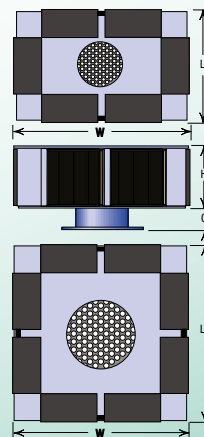


S20-0008-FF-360


S20-0003-FF-200



S20-0004-FF-200



S20-0002-FF-200



S20-0001-FF-120