



# FIL-TREK

## LM SERIES

### Polished Single Cartridge Housing

- Single Cartridge Filter Housing
- Polished Stainless Steel 316

Multi-purpose Single Cartridge Filter Housing available in a range of sizes.



#### SUITABLE USES



Air & Gas



Desalination



Coolant



Water



Electronics



Coatings



Oil & Gas



Chemical



Pulp & Paper



Power



Marine



Equipment

#### MEDIA

Accepts one (1) 10", 20", 30" or 40" cartridge  
Housings accept industry standard double open or 222 end style cartridges

#### DESIGN PRESSURE

150psig (10.3bar) @ 250°F (121.1° C) design pressure

#### AVAILABLE MATERIALS

Vessels available stainless steel 316

#### ADDITIONAL FEATURES

Band clamp closure allows for quick element change out

Fischer-Robertson, Inc.  
3890 Symmes Road, Hamilton, OH 45015  
ph 513-860-3445 fx 513-860-4744  
[www.fischer-robertson.com](http://www.fischer-robertson.com)

# LM SERIES

## Polished Single Cartridge Housing

- Single Cartridge Filter Housing
- Polished Stainless Steel 316



### HOUSING SPECIFICATIONS


<b>INLET/OUTLET</b>	1" NPT
<b>DIRTY DRAIN</b>	¼" NPT
<b>CLEAN DRAIN</b>	¼" NPT
<b>VENT</b>	¼" NPT
<b>GAUGES</b>	¼" NPT
<b>ELEMENT SELECTION</b>	E1 – Double Open End E4 – 222/Flat Single Open End E5 – 222/Fin Single Open End

### MECHANICAL SPECIFICATIONS

MODEL	# OF 2.5" FILTERS	FLOW RATE-GPM (2.5" FILTERS)	MAX INLET/OUT-LET (IN)
S6LM01-1-1P	1	5	1"
S6LM01-2-1P	1	10	1"
S6LM01-3-1P	1	15	1"
S6LM01-4-1P	1	20	1"

### MODEL DIMENSIONAL DETAILS

MODEL	SHIPPING WEIGHT (LBS)	OVERALL HEIGHT	OVERALL DIAMETER
S6LM01-1-1P	8	15 9/16"	4 3/16"
S6LM01-2-1P	12	25 9/16"	4 3/16"
S6LM01-3-1P	16	35 9/16"	4 3/16"
S6LM01-4-1P	20	45 9/16"	4 3/16"

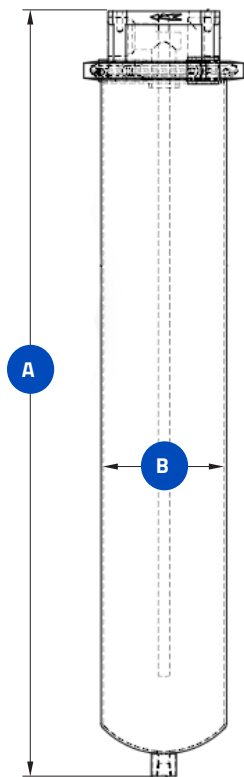

#### CHART LEGEND

- A** OVERALL HEIGHT
- B** BODY DIAMETER

### PRODUCT NOMENCLATURE

S6	LM	01	4	1P
MATERIAL	MODEL	# OF CARTRIDGES	LENGTH OF CARTRIDGES	SIZE OF INLET / OUTLET
S6 – SS 316	LM - Non Code	01 - 1 Cartridge	10" 20" 30" 40"	1P - 1" NPT